

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International publication date  
4 August 2005 (04.08.2005)

PCT

(10) International publication number  
WO 2005/070250 A1

(51) International patent classification<sup>7</sup>:

A44C 5/00

(81) Designated states (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(21) International application number:

PCT/EP2005/000432

(22) International filing date: 18 January 2005 (18.01.2005)

(25) Language of filing:

German

(26) Language of publication:

German

(30) Data relating to the priority:

20 2004 000 890.4 21 January 2004 (21.01.2004)

DE

(84) Designated states (unless otherwise indicated, for every kind of regional protection available): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL,

(71) Applicant and

(72) Inventor: WÖBKE, Klaus [DE/DE]; Bayernstrasse 3,  
89537 Giengen (DE).


(74) Attorney: LORENZ, Werner; Alte Ulmer Strasse 2, 89522  
Heidenheim (DE).

*[continued on next page]*

As printed

(54) Title: BÄNGEL

(54) Bezeichnung: ARMREIHN

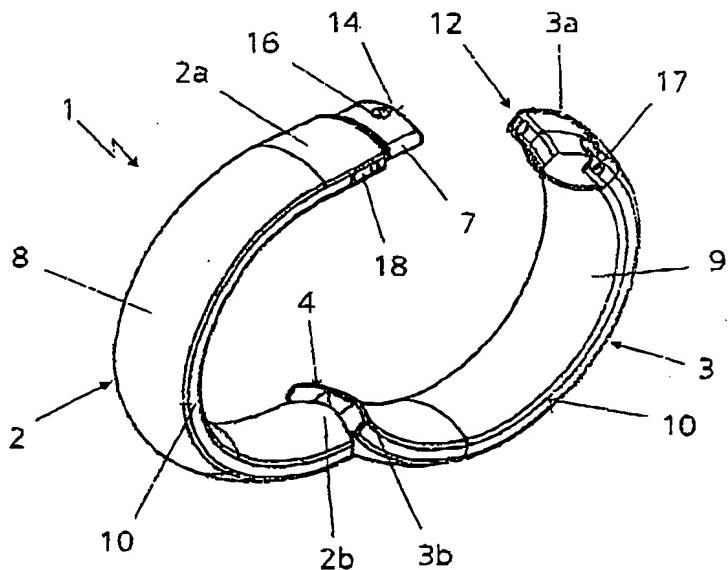

WO 2005/070250 A1

(57) Abstract: The invention relates to a bangle comprising an annular-shaped cover which is formed, essentially, of two curved tubes. The tubes are connected together on one of the tube ends by means of a hinge, and comprises a liquid tank. One tube is embodied in such a manner that it receives the liquid tank, and a spraying head of the liquid tank protrudes into a tube end of the adjacent tube. The two tubes can be displaced in relation to each other in the region of the tube end thereof which is oriented away from the hinge.

*(Fortschreibung auf der nächsten Seite)*

*[continued on next page]*

BEST AVAILABLE COPY